



X 2

Fast-charging LCD Li-ion/ Ni-MH Battery Charger

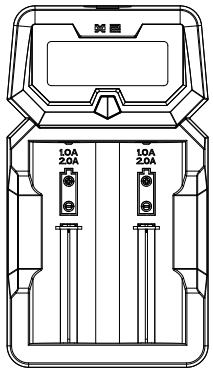

*Insured worldwide by China Pacific Insurance Company.

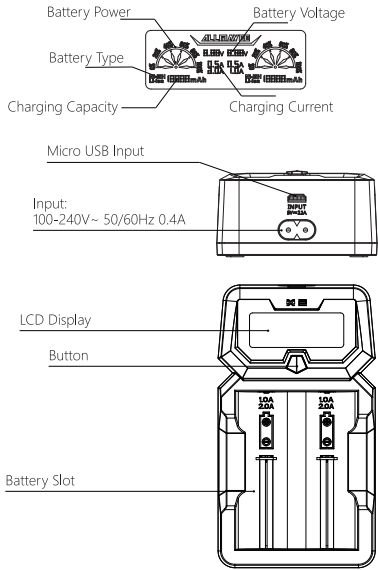

①

Features

1. Max 2Ax1 quick charging.
2. Automatically choose the charge current.
3. Get to know real battery status from LCD display.
4. Extra micro USB port powers up battery on the car.
5. 0V Activation function revives over-discharged batteries.
6. TC/CC/CV three-stage charging maximizes battery lifespan.
7. Precisely cut off at 4.2V when the battery is fully charged.
8. Current Buffering Technology keeps batteries from violent currents.
9. Reverse-polarity / short circuit / overcharge / overheat protection.
10. Made by flame retardant material.
11. Insured worldwide by China Pacific Insurance Co., Ltd.

Warnings

1. When the power supply is insufficient, the charger will reduce the charge current correspondingly.
2. Do not charge unsuitable batteries with the charger.
3. Keep the charger away from humidity, water, and excessive dust.
4. Children should use the charger accompanied by an adult.
5. Do not disassemble or use the charger if it is damaged.
6. For more and updated info, please visit www.allmaybe.com

②

Specifications

Model	X2
Input	100-240V- 50/60Hz 0.4A 5V $\overline{ms}$ 2.1A
Constant Current	2A $\times$ 1 / 1A $\times$ 2 / 0.5A $\times$ 2
Cut-Off Voltage	4.20 $\pm$ 0.05V 1.45 $\pm$ 0.1V
Operating Temperature	0-40℃
Size	135mm(L) $\times$ 175 mm(W) $\times$ 38mm(H)
Net Weight	125g

Apply to:

3.6V/3.7V LI-ion/IMR/INR/ICR
14500/14650/16340/17335/17500/17670/18350/18490/18500/
18650/18700/20700/21700/22650/25500/26650
1.2V Ni-MH/Ni-CD
AAAA/AAA/AA/A/SC/C

③

Operation

I. Charging Function

- 1.1 Connecting to the power supply, then all the characters on LCD screen will light up. After 1.5s, the charger enters standby mode.
- 1.2 After inserting the batteries correctly, the charger identifies the battery type and chooses the proper current automatically.
- 1.3 When the battery is fully charged, the screen will alternately show the charging capacity and "Full", and voltage meter indicates the battery voltage in real time.
- 1.4 Long press the button 1.5s to turn off the backlight. After 1 minute without any operation, the screen will enter the low brightness mode automatically.

II. 0V Activation Function

Insert batteries, revivable batteries will start charging within 10 minutes.

III. Intelligent Adjust Charging Current

When the input power is lower than nominal power, the charger will automatically identify the maximum input power, and adjust charging current.

④

Warranty

12 months free repair for quality-related issue with non-artificial damage after purchase.

Note:

1. Please take the product (with warranty number) and receipt to local dealer to get after-sales service.
2. You can find warranty number on the product.


Global After-sales Email: service@allmaybe.com

Shenzhen XTAR Electronics Co., Ltd
Address: 5th Floor, No.77 Xinhe Rd, Shangmugu, Pinghu Area,
Longgang District, Shenzhen, Guangdong, China 518111
Tel/Fax: +86-755-25507076
Website: www.allmaybe.com Email: service@allmaybe.com
www.facebook.com/allmaybeCN


V1

X 2

快充LCD锂/镍氢电池充电器

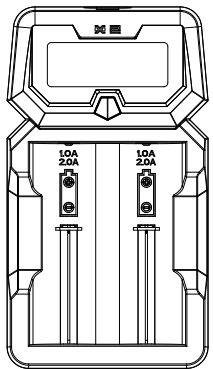

*本产品由中国太平洋保险有限公司全球承保。

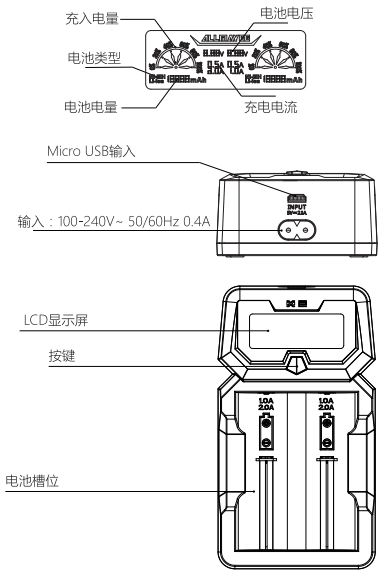

①

特点

1. 最大单槽2A快充
2. 智能匹配电流
3. 通过LCD显示屏，您可以知道电池的真实状况
4. 附带一个Micro USB接口，使您在车上也能给电池充电
5. 0V激活功能拯救过放电池
6. 三段式充电使电池使用寿命最大化
7. 充电电压达到4.2V时，精准截止
8. 电流缓冲技术可防止电池受到剧烈的电流冲击
9. 防反接/防短路/过充/过热保护
10. 阻燃材料制成
11. 本产品由中国太平洋保险有限公司全球承保

温馨提示

1. 电源电压不足时，充电器将对应降低充电电流。
2. 请勿使用非适配电池以免损坏电池或充电器。
3. 请勿在阳光暴晒、潮湿（雨水）或灰尘严重的环境下使用充电器。
4. 请勿擅自拆卸或改装充电器，严禁在损坏的情况下使用充电器。
5. 未成年人必须在大人的陪同下使用充电器。
6. 获取更多信息，请访问www.allmaybe.com

②

参数表

型号	X2
输入	100-240V- 50/60Hz 0.4A 5V $\overline{ms}$ 2.1A
恒定电流	2A $\times$ 1 / 1A $\times$ 2 / 0.5A $\times$ 2
截止电压	4.20 $\pm$ 0.05V 1.45 $\pm$ 0.1V
运行温度	0-40℃
尺寸	135mm(长) $\times$ 175 mm(宽) $\times$ 38mm(高)
净重	125克

适用于：

3.6V/3.7V可充锂离子电池：
14500/14650/16340/17335/17500/17670/18350/18490/18500/
18650/18700/20700/21700/22650/25500/26650
1.2V镍镉镍氢电池：
AAAA/AAA/AA/A/SC/C

③

操作

I. 充电功能

- 1.1 将充电器接通电源，LCD屏所有字段点亮，1.5S后进入充电待机状态。
- 1.2 将电池正确置入充电通道后，充电器自动识别电池类型，安全智能充电。
- 1.3 1.3当充电完成后，屏幕交替显示充入容量和“Full”，电压表实时指示电池电压。
- 1.4 按键长按1.5S关闭背光，1分钟内无任何按键动作或无电池放入，背光自动转为低亮模式。

II. 0V 激活功能

插入电池，可激活电池会在10分钟内开始充电。

III. 智能调整充电电流

当电源输入功率低于额定功率时，充电器自动识别输入功率，降低充电电流，以确保低功率适配器也能正常充电。

④

售后服务

若产品在购买12个月内，出现非人为导致的质量问题时，免费保修。

注意：

1. 请提供带保修号的产品和发票给当地经销商以获取售后服务；
2. 您可以在产品上找到保修号。

全球售后邮箱: service@allmaybe.com

深圳市爱克斯达电子有限公司
地址：广东省深圳市龙岗区平湖上木古村新河路77号5楼
T电话/传真: (+86)755-25507076
网址: www.allmaybe.com 邮箱: service@allmaybe.com
邮编：518111

V1