

Model No.: **GP24G**  
**LEAD FREE BATTERY**


NO MERCURY, CADMIUM & LEAD ADDED	
Description	: Extra Heavy Duty Battery, AAA Size
Chemical System	: Zinc-Manganese dioxide (Zinc Chloride)
Nominal Voltage	: 1.5 Volts
Max. Dimensions	: $\phi$ 10.5mm×44.5mm
Terminals	: Protruded positive (+) and flat negative (-) contacts
Jacket	: Print tube
Applications	: All electronic devices, e.g. toys, data banks auto appliances, calculators, remote controls, portable lightings.
Effective Period	: 36 months (Storing at -10°C to 25°C and 60±20%RH)
Weight(Reference)	: 8.5g

### Cross References:


GP	JIS	IEC	ANSI
24G	R03	R03	24D

### Typical Service Life:

Discharge Resistance	Discharge Condition	End Point Voltage	Service Life
15 Ohms	24 hr/day	0.9V	260mins

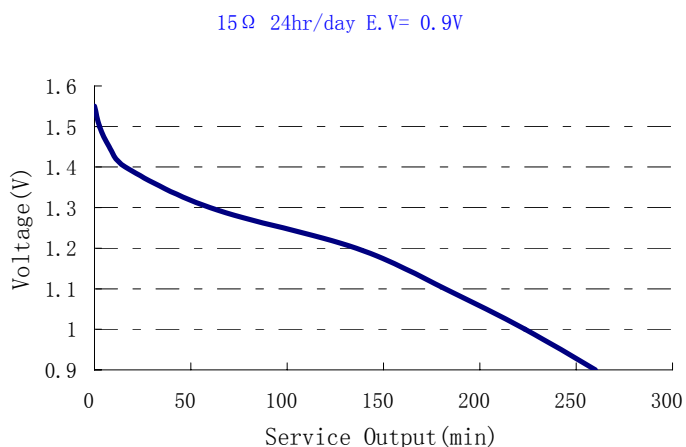

At 20±2°C within 60 days of manufacture

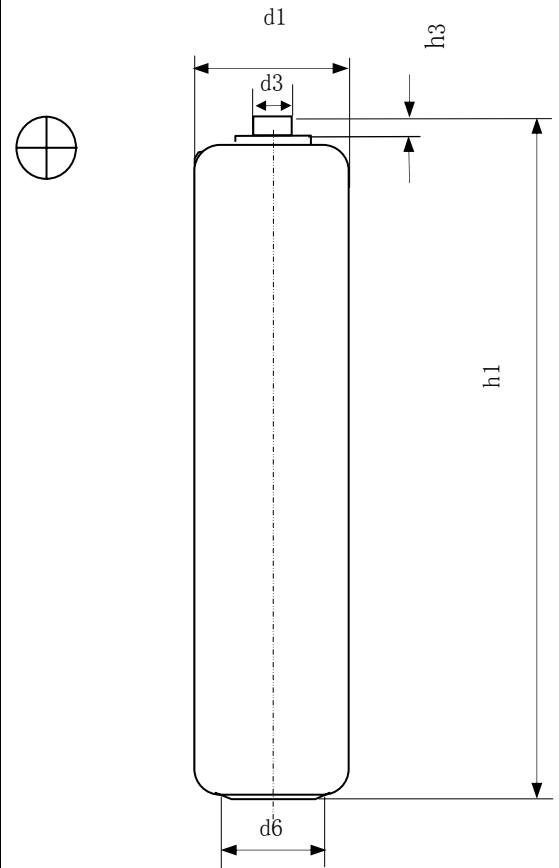

Unit: mm

Dimensions		R03
h1	max	44.5
	min	43.5
h3	min	0.8
d1	max	10.5
	min	9.8
d3	max	3.8
d6	min	4.3

Unit: mm

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors