


Cell Type N-3000CR


Specifications

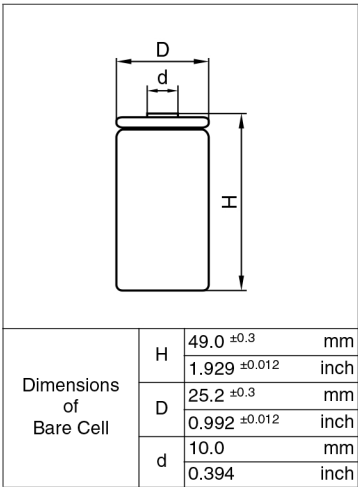


Nominal Capacity			3000mAh				
Nominal Voltage			1.2V				
Charging Current		Standard	300mA				
		Fast	4500mA				
Charging Time		Standard	14 to 16Hrs.				
		Fast	about 1Hr.				
Ambient Temperature	Charge	Standard	0°C to +45°C [+32°F to 113°F]				
		Fast	5°C to +40°C [+41°F to 104°F]				
	Discharge		-20°C to +60°C [-4°F to 140°F]				
	Storage		-30°C to +50°C [-22°F to 122°F]				
Internal Impedance (Av.) (at 50% discharge)			3.4mΩ (at 1000Hz)				
Weight			84g/2.96oz				
Dimensions(D)×(H) (with tube)			26.0	⁰ _{-0.8}	× 50.0	⁰ _{-1.2}	mm
			1.02	⁰ _{-0.03}	× 1.97	⁰ _{-0.05}	inch

Typical Characteristics


Charge (5 cells pack)

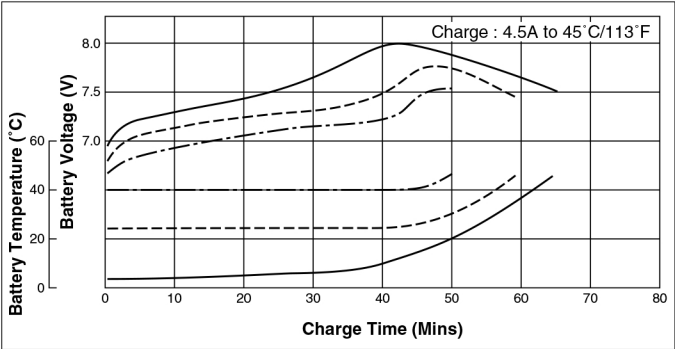


Discharge (at high rate)

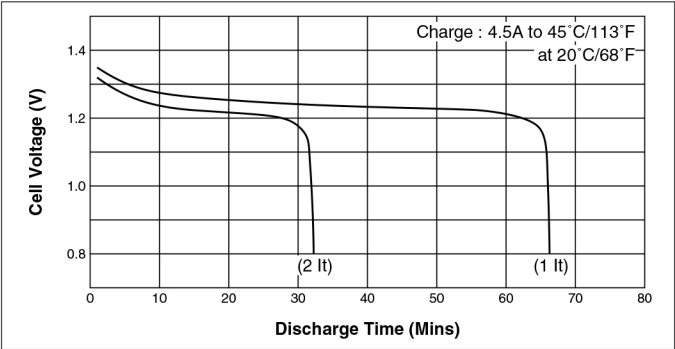


Cell Capacity (at various discharge rate)

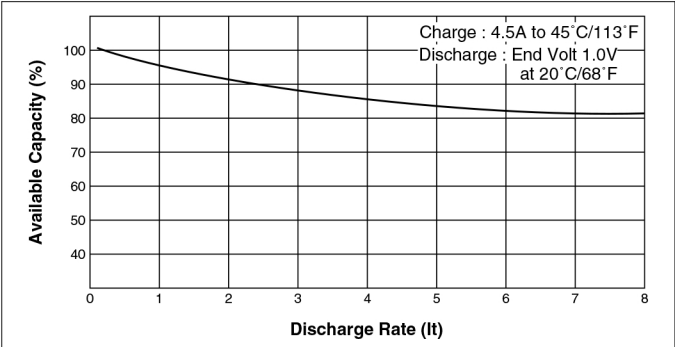

Discharge (at high rate)

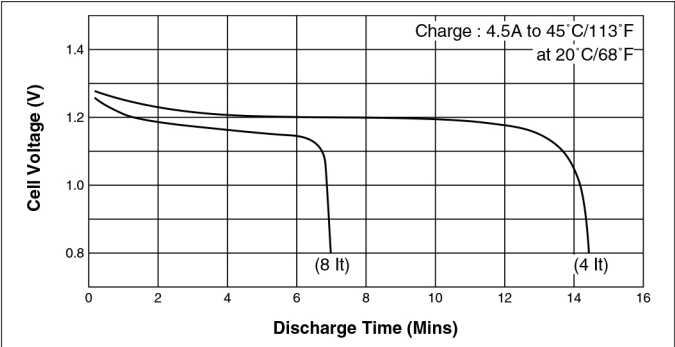

Discharge (at low rate)

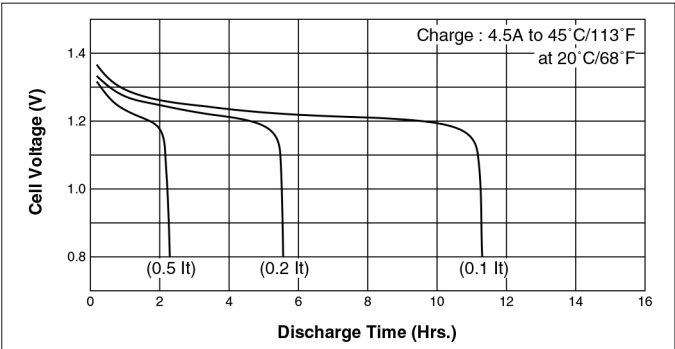

Temperature (Charge & Discharge)

