


MAGNEMITE H3R Rechargeable LED Headlamp

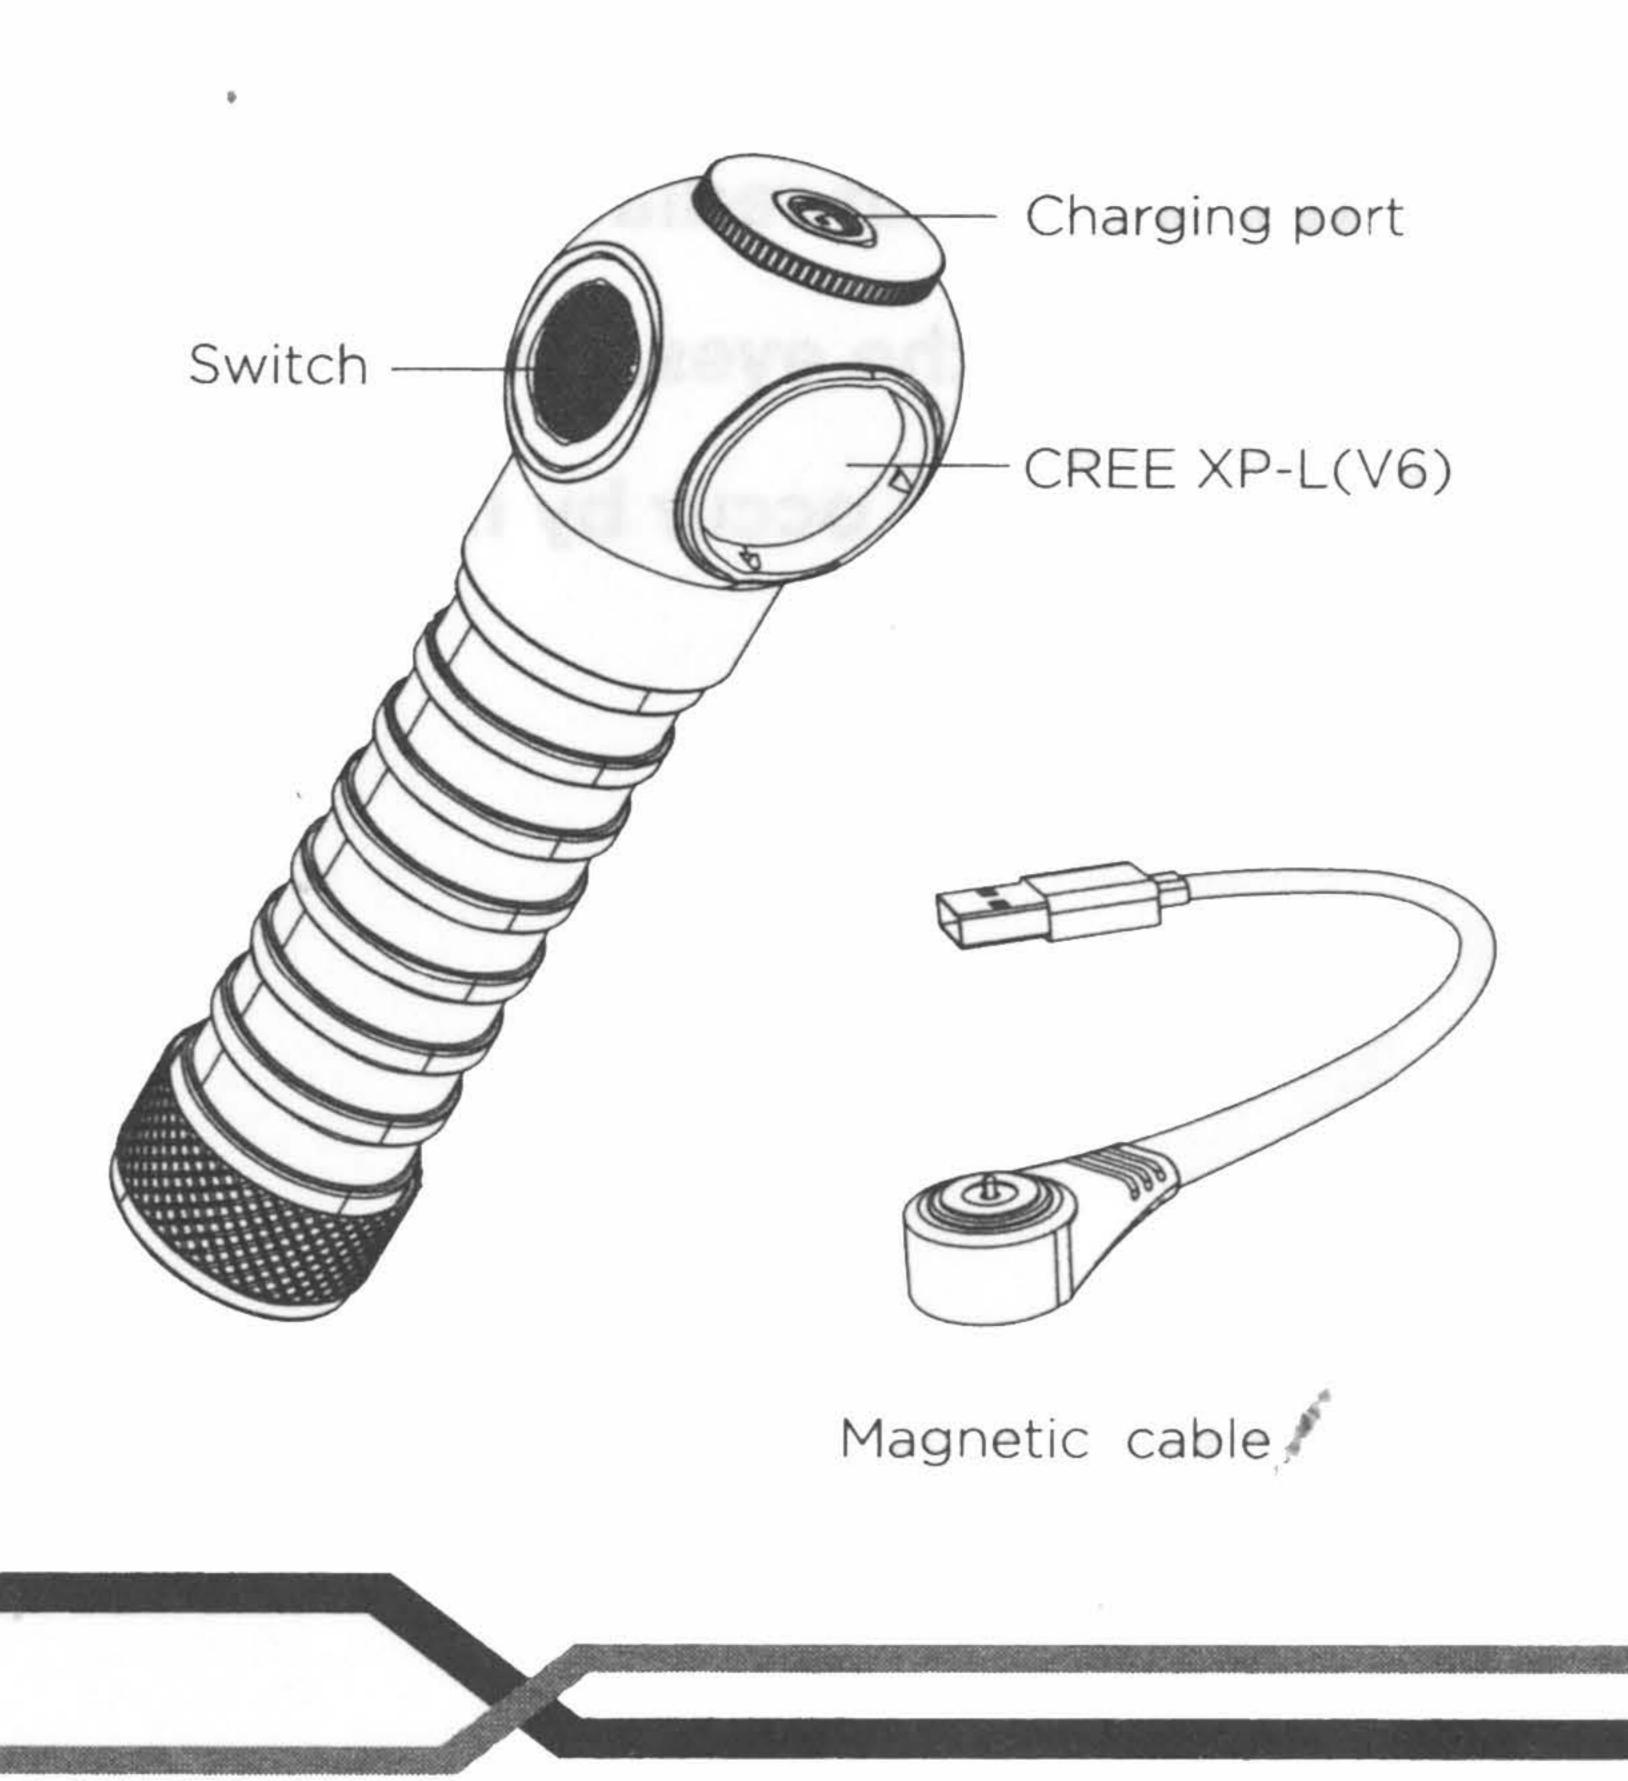

Introduction

MAGNEMITE H3R is a rechargeable headlamp equipped with magnetic cable, updated based on H3. Free from removing battery with creative magnetic cable. Secure you journey with low power remind and SOS mode. Comfort your experience with weight of 55g only and beam throw of 150m.

Technical parameter

ANSI	Turbo	High	Mid	Low	Moonlight	SOS
July 1	1000lm	500lm	240lm	60lm	5lm	500lm
0	2.5hrs	3.5hrs	7.1hrs	26hrs	18days	/
	150m					
	5630CD					
	1.5m					
T	IPx7					
E REAL PROPERTY OF THE PARTY OF	Ø 26.7mm (head) x Ø 21.9 (body) x 106.4mm (length)					
ŧ	55g (Battery excluded)					

A F

Notes

- Above-mentioned parameters (tested by using XTAR 18650 3500mAh) are approximate and may differ depending on battery and environment.
- 2. Compatible battery: 1*18650 &2*CR123A &2*16340
- 3. Working Voltage: 2.75-8.4V

Shenzhen XTAR Electronics Co., Ltd
5th Floor, No.77 Xinhe Rd, Shangmugu, Pinghu Area,
Longgang District, Shenzhen, Guangdong, China
Tel/Fax: (+86)755-25507076 E-mail: info@xtar.cc
Zip Code: 518111 Website: www.xtar.cc

V -

Operation

- 1. Choose mode.
- A.Moonlight/Low/Mid/High. When headlamp is on, long press switch and mode of headlamp rotates from Moonlight to Low, Mid and High. Release switch to choose current mode. And press switch to turn off headlamp.
- B. Turbo. Double press switch quickly (less than 1s), headlamp will enter Turbo mode, repeat again, headlamp will return to the former mode.
- C.SOS. Press switch trice/quickly, headlamp will come into SOS mode, and press switch to turn off headlamp.
- Lock and unlock headlamp. When headlamp is off, long press switch until moonlight disappears.
 To unlock headlamp, long press switch until it shows moonlight mode.
- Charge headlamp. Connect magnetic cable and headlamp. If light is red, headlamp is charging; If green, headlamp is full charged.
- 4. Install headlamp. Unscrew tail cap, and remove battery if battery is installed, then insert headlamp into rubber on the head belt. And install battery with positive pole (+) toward the head, and then screw the tail cap tightly.

Tips

- 1. Remove the battery if flashlight not in use for a long time.
- 2. Headlamp will degrade brightness mode when battery voltage is less than 3V. If headlamp brightness is degraded, the higher mode will not be presented until battery power is high enough.
- 3. If headlamp flicks three times, please charge/change battery for its power is low, the maximum charging current of magnetic cable is 1A. If charging via magnetic cable, battery installed should be 18650 rechargeable Li-ion battery.
- 4. Under Turbo mode, if headlamp runs more than 3mins, brightness will reduce to 60% of original to avoid overheat.
- 5. Please make sure positive pole (+) towards the head.
- 6. Please make sure tail cap is screwed tightly.
- 7. Do not wipe the battery with strong corrosive substance.
- 8. For more and updated information, please visit www.xtar.cc

Customer service

Please provide warranty number and receipt to dealer to get after-sales service.

- 15 days free replacement.
- 24 months free repair. If problems develop beyond 24 months, we will offer free repair service but charge for parts used. The distributor will inform you material fee or related freight if any before repair.
- Lifetime technical support.

Notes

- 1. Damage caused by misuse or intentional force is not covered by the warranty.
- 2. You are recommended to store warranty info online: register and login www.xtar.cc Member Center Warranty Information.
- 3. Warranty number can be found on the package or product.

Global After-sales Email: service@xtar.cc
US After-sales Email: serviceus@xtar.cc

Anti-fake inquiry

- 1. Scratch the anti-counterfeiting label on the package to get 18-digit number.
- 2. Input the number into the query page on www.xtar.cc (Contact Us Anti-fake).

Warning: Do not radiate the light directly towards the eyes, serious injury or blindness could occur by misuse.